

IMS

Watertight Doors

HYDRAULIC N200 / N280

Hydraulic operated watertight sliding doors models N200 / N280 are developed for areas where a threshold is required.

The doors come as one unit with the hydraulic cylinders pre-installed from our factory. No local hydraulic piping is necessary after installation.


The IMS watertight sliding doors are easy to install and maintain.



Door blade with bottom stiffener, wheel and rubber gasket


Bottom door frame (sill) with cylinder

Bulkhead

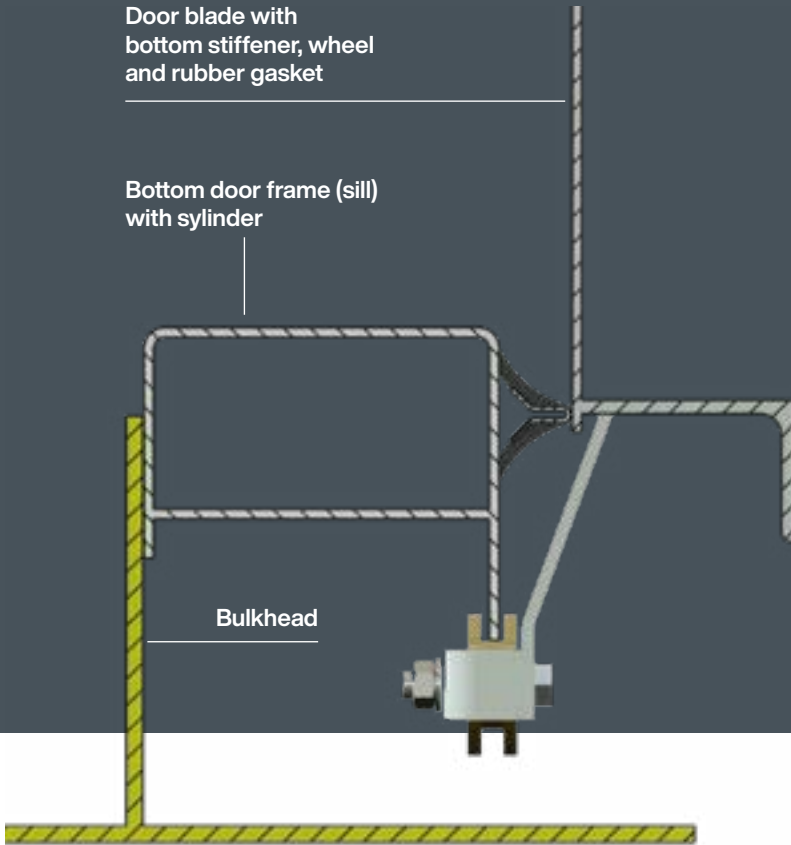

EVERYTHING PREPARED AT OUR FACTORY

Due to highly streamlined and automated production, door dimensions are always tailor made according to customer requirements.

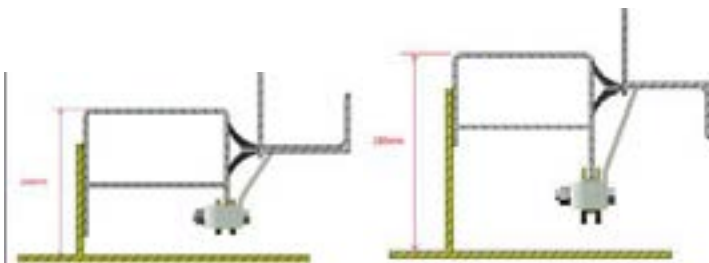

FEATURES

- Typical market segment: Cargo, PSV, OSV, subsea, offshore rigs, other offshore vessels
- Approved by all major class societies
- Individually calculated to achieve minimum weight
- EX-proof: zone 1 & 2 available upon request
- All doors delivered with test pressure as required, up to 60 mwc
- Sandblasted steel as a standard
- Laser safety strip available as an option

IMS